

TRADEMARKS

All brand names and products are Registered Trademarks of their respective Companies.

Warning: Your security camera is a quality digital product. You have to take utmost care while handling this product to insure its reliability & durability.

DISCLAIMER

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties with respect to the contents hereof and specifically disclaims any implied warranties of selling or functionality for any particular purpose.

Digital Peripheral Solutions Inc.
8015 E Crystal drive,
Anaheim, CA 92807,
1-877-998-3440.

Q-See tech support in U.S.A.
Mon-Fri : 9 am - 5 pm PST.
TEL : 1-877-998-3440
E-mail : ts@dpsi-usa.com
Website: www.q-see.com

User's Manual



MODEL: QSDNV



DOME COLOR INDOOR CAMERA WITH NIGHT VISION

WARNING

To prevent fire or shock hazard, do not expose the insides of the unit to rain or moisture.



This symbol is intended to alert the user to the presence of important operating and maintenance(servicing) instructions in the literature accompanying the appliance.



This symbol is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock



CAUTION

To prevent electric shocks and risk of fire hazards. Do not use other than specified power source.

CAUTION:

- Do not open the cover of the camera.
- Do not aim the camera at bright or strong light sources, this will make the camera ineffective in capturing pictures.

SPECIFICATIONS


| Spec. | Model |
|-----------------------|---|
| Image Sensor | 1/3" Color |
| Horizontal Resolution | 400 TVL |
| Minimum Illuminance | < 0.5Lux |
| Lens | 6.0mm |
| LED | 12 Lights |
| Power Supply | DC 12V |
| Power Consumption | 200mA |
| Dimensions | 95(W)x95(D)x85(H)mm |
| Weight | 165g |
| Operating Temperature | -20°C. - +70°C |
| Auto Gain Control | On/Off |
| Video Output | 1.0Vp-p 75 Ohm |
| Auto Iris | 1/50 1/6000 |
| S/N Ratio | > 48dB |
| Signal System | PAL/NTSC |
| Effective Pixels | PAL : 628 X 586 NTSC : 565 X 492 |
| Sensing Area | PAL : 5.96 X 4.28mm NTSC : 4.08 X 3.10mm |
| Gamma characteristics | 0.45 |
| Audio Output | 325mV/2.7k Ohm |
| Infrared Power On/Off | (Auto) |
| Night-Vision Range | 30Ft. |
| Cable length | 60Ft. |

- Please keep the camera within the limits of the assigned voltage and electric current.
- Please use the camera only in applications with temperatures below 70°C(158°F).
- Please use the right electric cable to power the camera.
- Don't use corrosive substances to clean the glass.


CAUTION: Any changes or modifications to this camera which are not expressly approved by the party responsible for compliance could void the users warranty.

CONNECTORS AND CONTROLS

- ### 1. Simplest one monitor system with one camera.

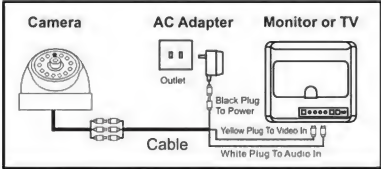

2. One monitor with two or more cameras.

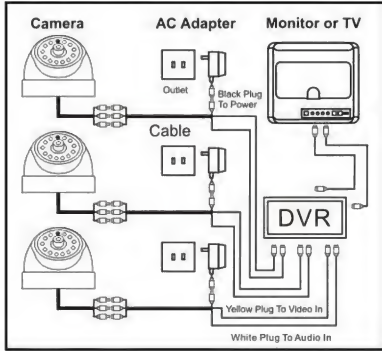

PRODUCT FEATURES

QSDNV is a high quality camera for CCTV systems. They feature the latest technology and deliver clear and accurate scale of color images.

QSDNV is small, light weight easy to install and easy to use.